



FDS PRO

France Détection Services

7A La Cigalière 2 - 84250 Le Thor
Tél: 04.90.33.75.14 - Fax: 04.90.33.75.17
contact@fdspro.com - www.fdspro.com
S.A.S ou capital de 300 000 € - Siret 330 490 074 00076 - APE 4689A
N° TVA INTR 330 490 074

CI194

- ★ Camera pixels: 1280*720
- ★ One-touch video/audio recording and image capture
- ★ Enregistrement photo et vidéo
- ★ Support max 256G SD card / Clé USB
- ★ Cable M/FT counter and text
- ★ Zoom function (8 niveaux)
- ★ Sonde 512Hz & camera
- ★ Support CVBS output and input
- ★ Batterie 4H
- ★ Boitier de rangement

Parre-soleil

Image capture

Record video/audio

Support Type-C OTG card reader

Zoom in (8 levels)

Zoom out

Text

M/FT switch

Tool storage box

10.1 inch TFT LCD screen

LED brightness adjustment

Cable brake

Counter reset

Camera head

SD card slot

Power button


Accessories

<p>C23ABH</p>  	<p>Camera size: $\varnothing 23\text{mm} \times 240\text{mm}$ Camera pixels: 1280*720 Sensor size: 1/3 inch View angle: 90° Leds: 12pcs Waterproof: IP68 Skids: 40/80mm Lens material: Sapphire glass Suitable pipe diameter: 60-200mm 512Hz transmitter & Self-levelling</p>	<p>K-HD1</p> 	<p>10.1 inch TFT LCD screen: 280*220*37.5mm Total pixels: 1024*600 Storage medium: 8G SD card (max 256G) & USB stick & Type-C OTG card reader 8 levels digital zoom Video format: AVI Photo format: JPEG Support CVBS output and input Battery: 6000mAh 12V M/FT switch and Count reset</p>
<p>X-HD1</p> 	<p>Cable size: $\varnothing 350 \times 71\text{mm}$ Counter Cable length: 30m Cable diameter: $\varnothing 6.3\text{mm}$, 4-core coaxial</p>	<p>X-HD1A</p> 	<p>Wire frame size: 360*455*215mm Wire frame material: aluminum alloy Tool storage box The coil is easy to replace, and the 4 screws that fix the back cover are removed.</p>
			 

Optional

Camera head	C23H	C23HL
Size	ø23mm*134mm	ø23mm*134mm
Video resolution	1280*720	1280*720
Leds	12pcs	12pcs
View angle	105°	105°
Self-levelling	×	×
512Hz transmitter	×	✓
Waterproof	IP68	IP68
Suitable pipe diameter	60-200mm	60-200mm
S23/28-US universal skid	✓	✓

512Hz Receiver and transmitter	512R	512T1
Size	512l*110w*118hmm	ø16*45lmm
Range	5m	4.5m

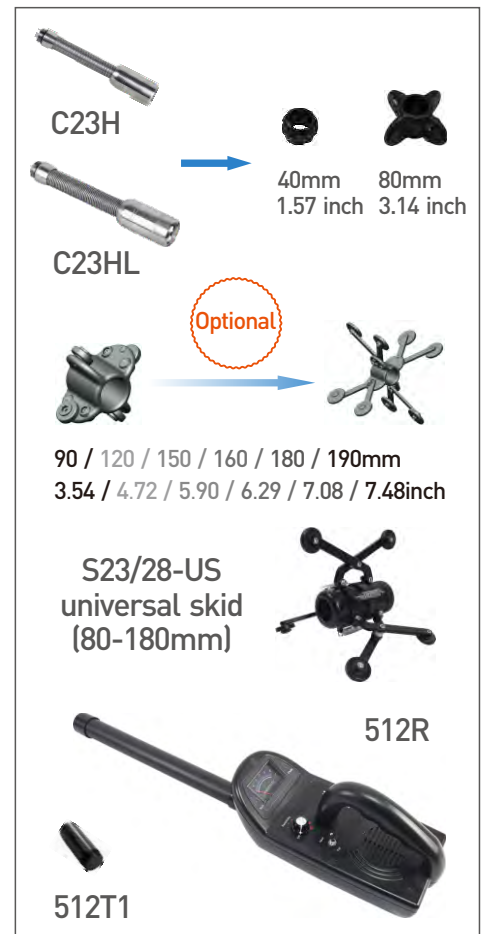

Details

